




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: hp #82 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 3V |
| Test item: Radiation Test | Date: 13/11/14/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: 18/21/02 |
| EUT: | Engineer Signature: PEI |
| Mode: TX 433MHz | Distance: 3m |
| Model: RFM69HC-433S2(5dBm) | |
| Manufacturer: | |

Note: -2

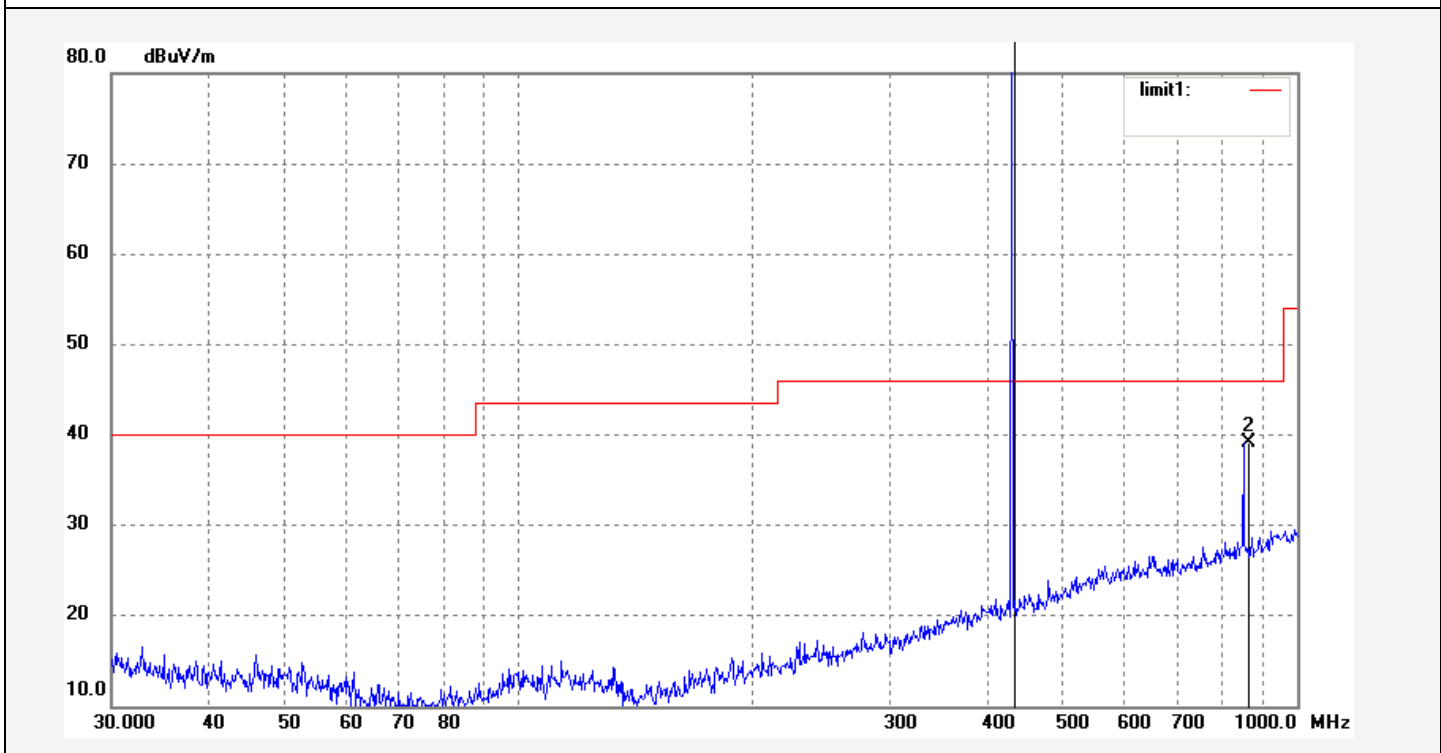

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 433.9200 | 104.13 | -5.96 | 98.17 | 46.00 | 52.17 | peak | | | |
| 2 | 867.8300 | 38.04 | 1.04 | 39.08 | 46.00 | -6.92 | peak | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|-------------------------|
| Job No.: hp #83 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: DC |
| 3V Test item: | Radiation Test Date: |
| 13/11/14/ | |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: 18/22/06 |
| EUT: | Engineer Signature: PEI |
| Mode: TX 433MHz | Distance: 3m |
| Model: RFM69HC-433S2(5dBm) | |
| Manufacturer: | |

Note: -2

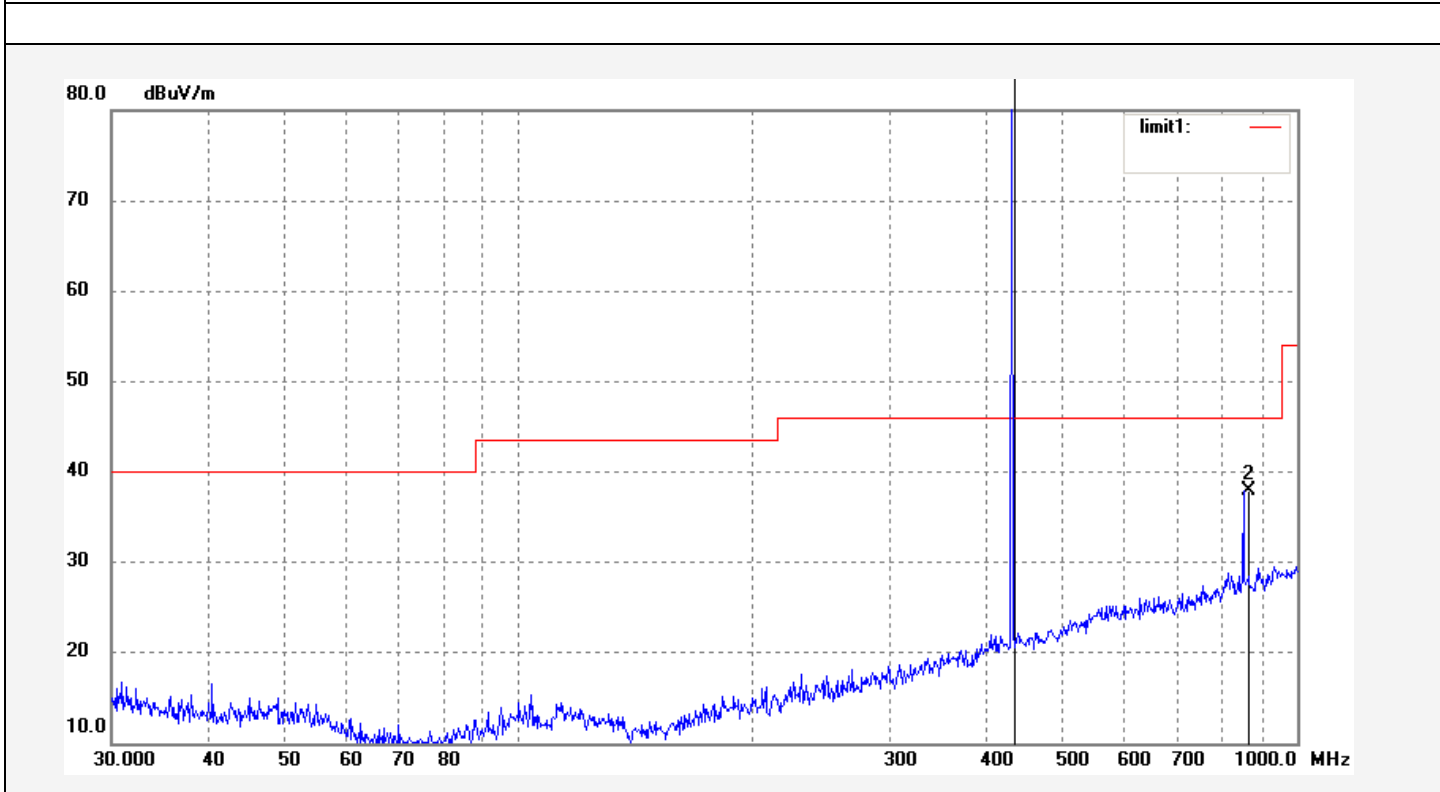

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 433.9200 | 104.79 | -5.96 | 98.83 | 46.00 | 52.83 | peak | | | |
| 2 | 867.8300 | 36.93 | 1.04 | 37.97 | 46.00 | -8.03 | peak | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: hp #88

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3V

Test item: Radiation Test

Date: 13/11/14/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18/38/10

EUT:

Engineer Signature: PEI


Mode: TX 433MHz

Distance: 3m

Model: RFM69HC-433S2(5dBm)

Manufacturer:

Note: -2

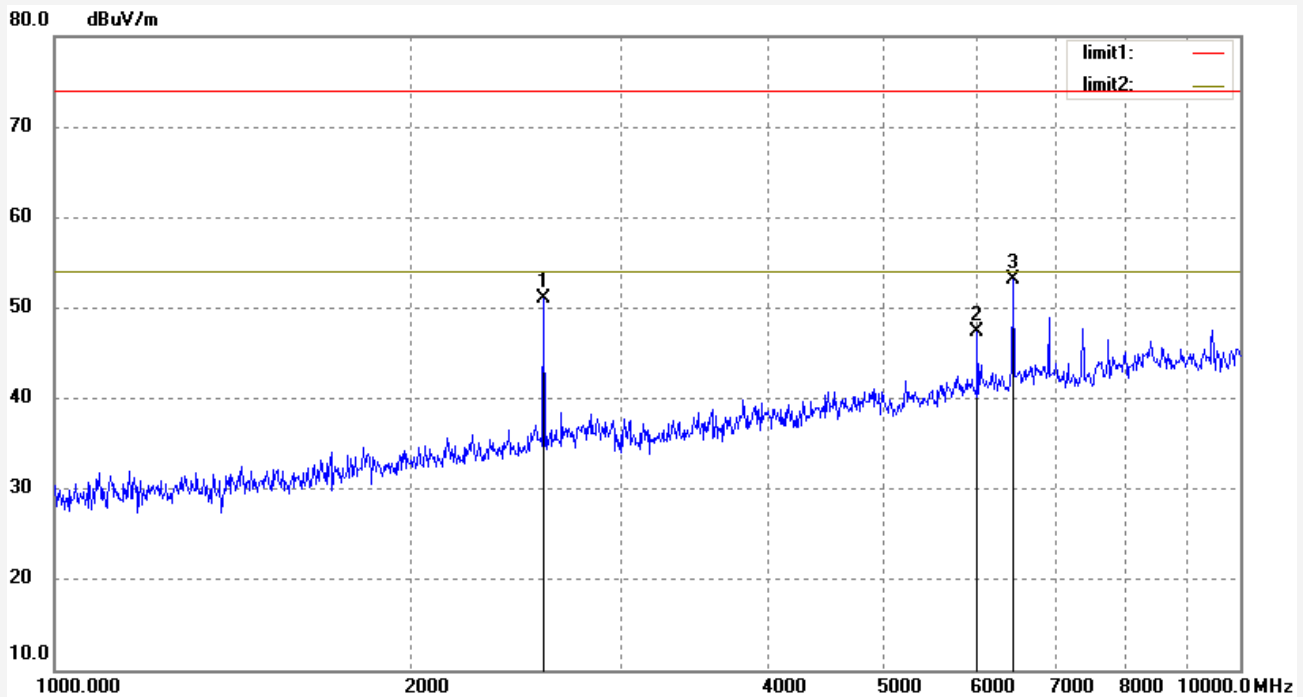

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2587.559 | 57.87 | -6.77 | 51.10 | 74.00 | -22.90 | peak | | | |
| 2 | 6004.117 | 45.06 | 2.30 | 47.36 | 74.00 | -26.64 | peak | | | |
| 3 | 6436.661 | 50.32 | 2.77 | 53.09 | 74.00 | -20.91 | peak | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: hp #89

Polarization: Vertical

Standard: FCC PK

Power Source: DC

3V Test item:

Radiation Test Date:

13/11/14/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18/39/54

EUT:

Engineer Signature: PEI


Mode: TX 433MHz

Distance: 3m

Model: RFM69HC-433S2(5dBm)

Manufacturer:

Note: -2

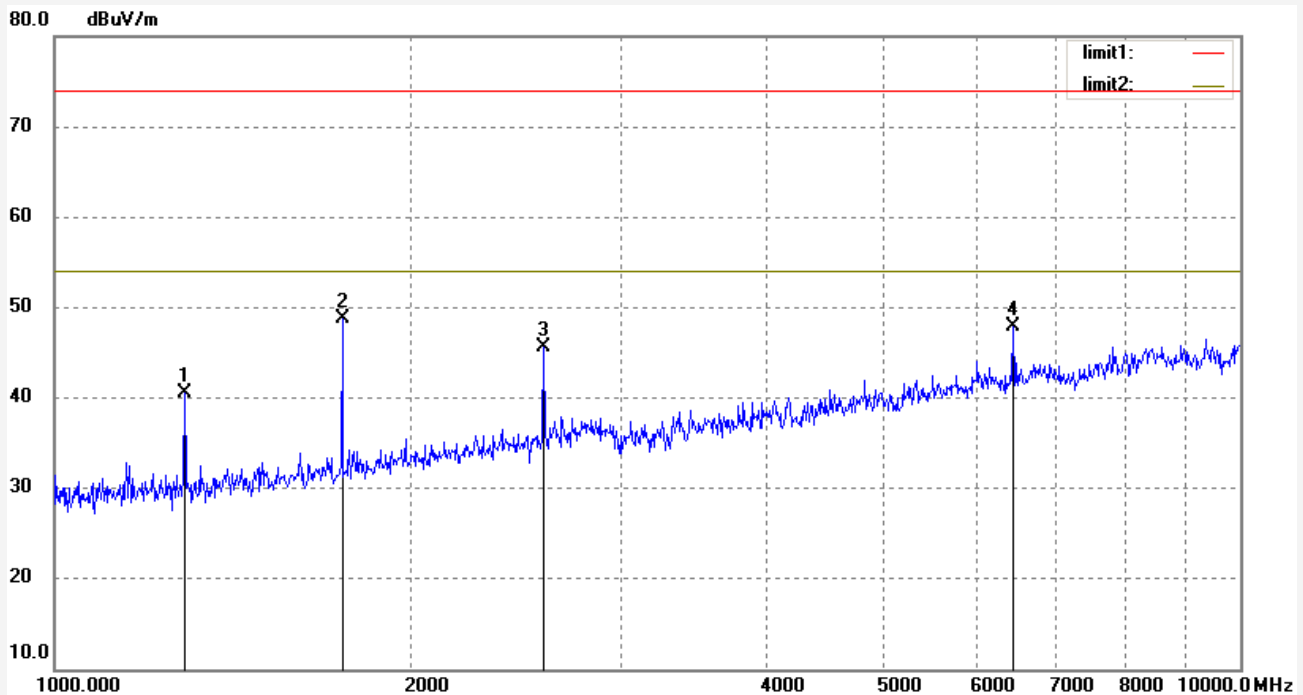

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 1287.563 | 52.72 | -12.22 | 40.50 | 74.00 | -33.50 | peak | | | |
| 2 | 1748.634 | 59.22 | -10.45 | 48.77 | 74.00 | -25.23 | peak | | | |
| 3 | 2587.559 | 52.30 | -6.77 | 45.53 | 74.00 | -28.47 | peak | | | |
| 4 | 6436.661 | 45.07 | 2.77 | 47.84 | 74.00 | -26.16 | peak | | | |